

BUSHINGS

Frictional bearings

Open & ground tolerance



SIZES

Outer diameter from 3 to 350mm
Height from 1.5 up to 300mm
Wall thickness/height > 0.10

AS SINTERED

Ra 3.2
Tolerances down to $\pm 1\%$

STANDARD GRADES


Grade portfolio with hardness HV30 from 900 to 2200
Corrosion resistance grades down to pH>2

OPTIONS

Ground tolerances up to μm level
Shape features as chamfers, radii, slots, holes, key-way
Inner and outside profiles
Roughness from to Ra 0,2-0,5 to 0,025
Laser engraving

Customized packaging: plastic trays, thermo-/vacuum- sealed, bubble envelope.

Additional sizes and tolerances, grades and quantities (eg tests) are available upon request.

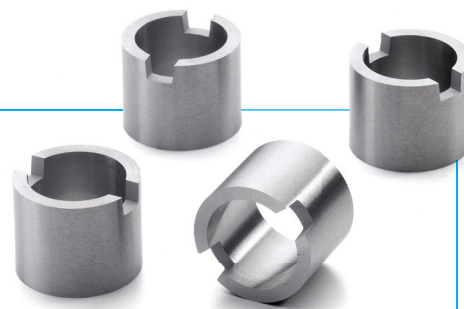

SANDVIK HYPERION
www.hyperion.sandvik.com
info.sandvikhperion@sandvik.com

